




ANSEC

In Ceiling Speaker SPK3

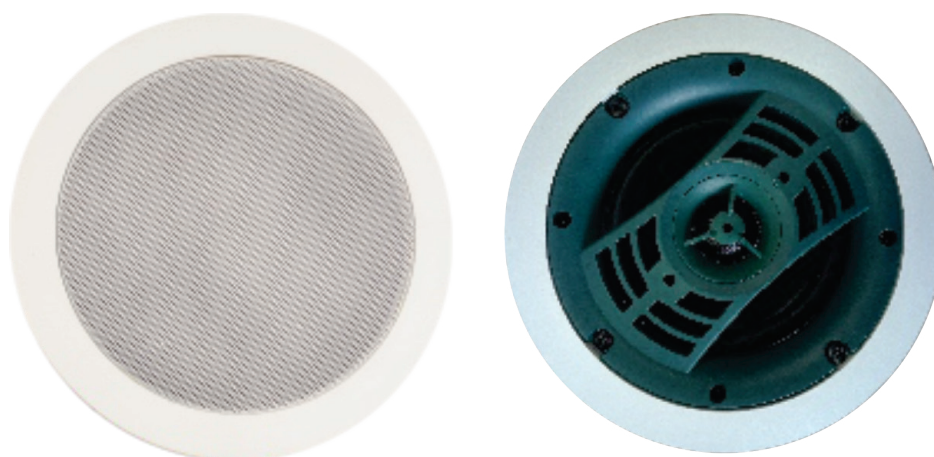

Specification / Model	SPK3
Speaker caliber	4 x 1,1.5 x 1
Rated power	20W
Max power	40W
Material	ABS + iron grill
Input (KΩ)	8Ω
Frequency Response (Hz)	90-20KHz
Sensitivity (1w/1m)	91±3dB
Weight	0.85kg
Size (mm)	Ø180x95
Carton dimensions (16PCS)	440x400x390 mm

High-quality in-ceiling low impedance loudspeakers, delivering exceptional sound quality and value for a wide variation of applications, ranging from paging and announcements to background music systems in a wide range of business applications, including hotels, restaurants and pubs, corporate offices, retail stores. The mounting of the loudspeaker into the ceiling is achieved with a quick-fix mechanism, offering great installers convenience and lifetime stability. The construction of the speakers' housing is made out of iron while the front is covered by a steel grill.

